
A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian wineyards, where the wine route starts, that the WineMaster® story begins. Our attachment to terroir and our love of wine have always been the source of our thought process and creativity.

Ever since its inception in 1984, the skills and know-how of the men and women of WineMaster® have been at the heart of every step in the air conditioner making process.

Quality and detail are what motivate us, and we are proud of our products and their 100 % Alsatian design.

INNOVATION AND EXCELLENCE ARE WINEMASTER'S KEY VALUES.

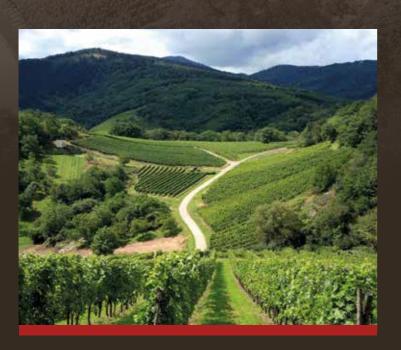

WINEMASTER le temps d'être différent

DESIGN, SILENCE AND SAVINGS

The Wine C25 model belongs to our family of inbuilt solutions. It is installed in an outer partition wall and will turn any properly insulated room into a real wine cellar. In addition to its totally innovative design, the product is endowed with highperformance technological equipment that ensures quietness and significant energy savings.



WINEMASTER le temps d'être différent

Z.I. VIEUX-THANN I 18 RUE GUY DE PLACE BP 60010 F68801 THANN CEDEX Tél : +33 (0) 389 377 515 🔳 E-mail : contact@winemaster.fr

www.winemaster.fr

BUILT-IN PRODUCTS







8-18°C

Air-conditioning up to 25m³

High performance integrated



Respectful of the environment


Ideal climate conditions for the preservation of you






WINE C25 / C25 S / C25 SR SILENT, EFFECTIVE AND ECONOMICAL


- Keeps cellars at a constant temperature of between 8 and 18 °C
- Humidity control : excess humidity is condensed and evacuated towards the outside
- Rubber shock absorbers are incorporated, creating an anti-vibration system
- Dimensions that make the product able to adapt to different rooms (store room, attic...)
- Controlled power consumption thanks to the reaction turbine on the condenser side
- Reheating feature for the Wine C25 S and Wine C25 SR models
- The Wine C25 SR model is equipped with a heating belt that provides protection in the event of difficult weather conditions (such as winter)
- Easy to install, provided with a wooden frame
- Easy upkeep: just a filter that needs to be changed once a year
- **2** year guarantee



.










ALWAYS QUIETER **ALWAYS MORE SAVINGS**

In addition to its innovative design, the WineMaster[®] C25 / S / SR air conditioner is equipped with high performance technology that is quiet and ensures significant energy savings (up to 30% less consumption compared to standard air conditioners).

THE ADVANTAGES OF THE WINE C25 AIR CONDITIONER

- The front-facing side has a textured look with silkscreen printing for a more upscale effect
- 2 rotation speed settings for the cellar-side fan engine
- The fan is equipped with «Energy Saver Motor» technology
- Operates silently thanks to the use of new materials



REFERI Electrical Air condi Overall di

Cooling o Electrical Sound lev Cellar air Outside a Coolant Heat resis

. Temnera

Maximu

Heating

The WineMaster[®] cellar door guarantees the optimal insulation of your wine cellar, a real asset to some of our WineMaster® air conditioners. It is very easy to install with only 7 fixing points for mounting the set and two possible opening versions (right or left).

ENCE	WINE C25	WINE C25 S	WINE C25 SR
supply	230-240 V - 50Hz	230-240 V - 50Hz	230-240 V - 50Hz
ioning capacity*	Up to 25 m ^{3*}	Up to 25 m ^{3*}	Up to 25 m ³ *
mensions	L.540 x H.381 x P.524 mm	L.540 x H.381 x P.524 mm	L.540 x H.381 x P.524 mm
	31 Kg	31 Kg	31 Kg
apacity**	550 W at 15°C	550 W at 15°C	550 W at 15°C
power absorbed	400 W	400 W	400 W
rel (at 1 m and 3 m)	45 dB / 40 dB	45 dB / 40 dB	45 dB / 40 dB
flow rate (cold side)	96 to 198 m³/h	96 to 198 m³/h	96 to 198 m³/h
irflow rate (hot side)	179 m³/h	179 m³/h	179 m³/h
	R449 A	R449 A	R449 A
stance	-	250 W	250 W
ure regulation*	Preset to 12 °C adjustable between 8 and 18 °C*	Preset to 12 °C adjustable between 8 and 18 °C*	Preset to 12 °C adjustable between 8 and 18 °C*
outside temperature**	35°C	35°C	35°C
belt	NO	NO	YES

* With right insulation and adapted to the volume of the cellar.

** The power could be reduced in function of outside temperature, its why the device may lose capacity to keep the cellar at 12 °C if the outside temperature gets close to 35 °C.

DISCOVER OUR OTHER SPECIAL PRODUCTS : HYGROMASTER[®] & WINEMASTER CELLAR DOOR[®]

HYGROMASTER®

On the wall, on the ground, or on a stable shelf, Hygromaster[®] is very easy to install. You can simply connect it to the carboy that comes with it. This reservoir kit supplies the Hygromaster[®] with demineralized



water. You can regulate the level of humidity to ensure it is appropriate for vour wine cellar.

WINEMASTER CELLAR DOOR®

