

A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian vineyards, where the wine route starts, that the WineMaster® story begins. Our attachment to terroir and our love of wine have always been the source of our thought process and creativity.

Ever since its inception in 1984, the skills and know-how of the men and women of WineMaster® have been at the heart of every step in the air conditioner making process.

Quality and detail are what motivate us, and we are proud of our products and their 100 % Alsatian design.

“INNOVATION AND EXCELLENCE ARE WINEMASTER'S KEY VALUES.”



WWW.WINEMEDIA Txt and photo are not contractual

WINEMASTER
le temps d'être différent

Z.I. VIEUX-THANN ■ 18 RUE GUY DE PLACE
BP 60010 ■ F68801 THANN CEDEX
Tél : +33 (0) 389 377 515 ■ E-mail : contact@winemaster.fr
www.winemaster.fr

WINEMASTER

le temps d'être différent

DESIGN, SILENCE AND SAVINGS

Wine master® offers an «INTEGRATED» version of the air conditioner with a different design and ever more improved efficiency. WINE IN25 is totally discreet, it allows you to air condition up to 25 cubic meters, and it has numerous advantages such as being silent and saving energy.

WINE CELLAR AIR CONDITIONER



25 m³ Air-conditioning up to 25m³

8-18°C High performance integrated thermostat

Quiet

Respectful of the environment

Ideal climate conditions for the preservation of your wine

WINE IN25



THE BUILT IN




WINEIN25

DESIGN, SILENCE AND SAVINGS

- Keeps cellars at a constant temperature of between 8 and 18 °C*
- Humidity control : excess humidity is condensed and evacuated towards the outside
- Rubber shock absorbers are incorporated, creating an anti-vibration system
- Controlled electrical consumption thanks to the ESM fan on the evaporator side
- Easy upkeep: just a filter that needs to be changed once a year
- 2 year guarantee

OPTIONAL KIT :

- X 2 straight conduits with Ø 125 mm connecting sleeve - length 2000 mm
- 2 X Ø 125 mm support collars
- 2 X single wire Ø 150 mm tightening collars
- 2 X right-angled connecting pipes with Ø 125 mm connecting sleeve
- 2 X telescope wall feedthroughs with vented closure flap

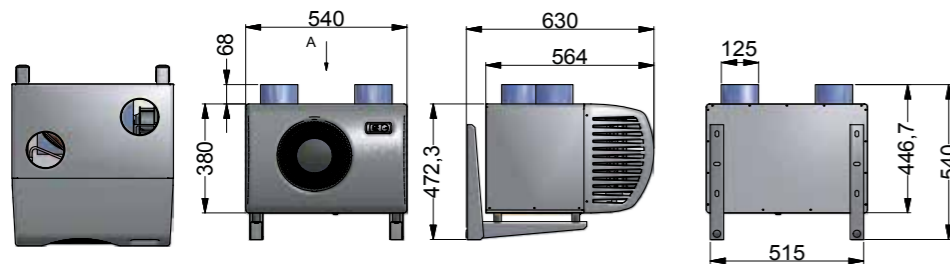


ALWAYS QUIETER ALWAYS MORE SAVINGS

In addition to its innovation design, the WineMaster® IN25 air conditioner is equipped with high performance technology that is quiet and ensures significant energy savings (up to 30% less consumption compared to standard air conditioners).

THE ADVANTAGES OF THE WINE IN25 AIR CONDITIONER

- Silence, efficiency and savings thanks to new materials
- Vent equipped with «Energy Saver Motor» technology
- Easy to install: ducts come out on top
- New accessory kit: saves time and provides optimal insulation

THE BUILT IN WINEMASTER®



REFERENCE	WINE IN25
Electrical supply	230-240 V - 50Hz
Air conditioning capacity*	Up to 25 m ³ *
Overall dimensions	L.540 x H.540 x P.630 mm
Weight	35 Kg
Cooling capacity	500 W at 15 °C
Electrical power absorbed	440 W
Sound level in the cellar (at 1m and 3m)	43 dB / 38 dB
Cellar airflow rate (cold side)	96 m ³ /h à 198 m ³ /h
Outside airflow rate (hot side)	450 m ³ /h
Coolant	R449 A
Heat resistance	250 W
Maximum outside temperature**	35°C

* With right insulation and adapted to the volume of the cellar.

** The power could be reduced in function of outside temperature, its why the device may lose capacity to keep the cellar at 12 °C if the outside temperature gets close to 35 °C..

DISCOVER OUR OTHER SPECIAL PRODUCTS: HYGROMASTER® & WINEMASTER CELLAR DOOR®

HYGROMASTER®

On the wall, on the ground, or on a stable shelf, Hygromaster® is very easy to install. You can simply connect it to the carboy that comes with it. This reservoir kit supplies the Hygromaster® with demineralized water. You can regulate the level of humidity to ensure it is appropriate for your wine cellar.



WINEMASTER CELLAR DOOR®

The WineMaster® cellar door guarantees the optimal insulation of your wine cellar, a real asset to some of our WineMaster® air conditioners. It is very easy to install with only 7 fixing points for mounting the set and two possible opening versions (right or left).

