

Spec Sheet - The Modular Free-Standing Wine Dispenser



Current PENDING CERTIFICATES



Technical specifications

Standard features of The Modular

- Climate control: (6-20° Celsius or 43-68° Fahrenheit) at 25 degrees room temperature (ambient)
- Preservation: either argon or nitrogen gas
- Serving: Standard (3 x) portion settings per bottle position
- Easily expandable by linking multiple units by using only one electricity cord (up to 6 units)
- Doors can be locked to avoid access
- Tubes which guide the wine are easy to change, optimum hygiene
- Two different cork types in order to fit all types of bottles
- The inner LED lighting is dimmable in two positions


Technical data

- Voltage: 90-295VAC (autoswitch)
- Frequency: 47-63Hz (autoswitch)
- Total power at work: max 165W per unit
- Thermoelectric cooling with ventilation outlet at the front side
- Digital electronic control system
- 3 x energy saving LED lights ("warm white")
- Dimensions including adjustable feet (excluding side panels) L x H x D = 250 x 690 x 230 mm
- Dimension (optional) side panels (L x H x D) 18 x 680 x 230 mm
- Steel door with thermopane glass
- Weight 22 kg
- Number of bottle positions: 2
- The system can be positioned stand alone, mounted to the wall or can be completely built in a wall, kitchen or cabinet
- One year guarantee on all components.

m o d u l a r

by the glass.eu

Model	unit height	Width	Length	Bottle capacity	Voltage	Hertz	Weight
The Modular	27,16" - 69 cm	9,8" - 25 cm	9,05" - 23 cm	2	90 - 295VAC	47 - 63Hz	48,7 lbs - 22,1 kg

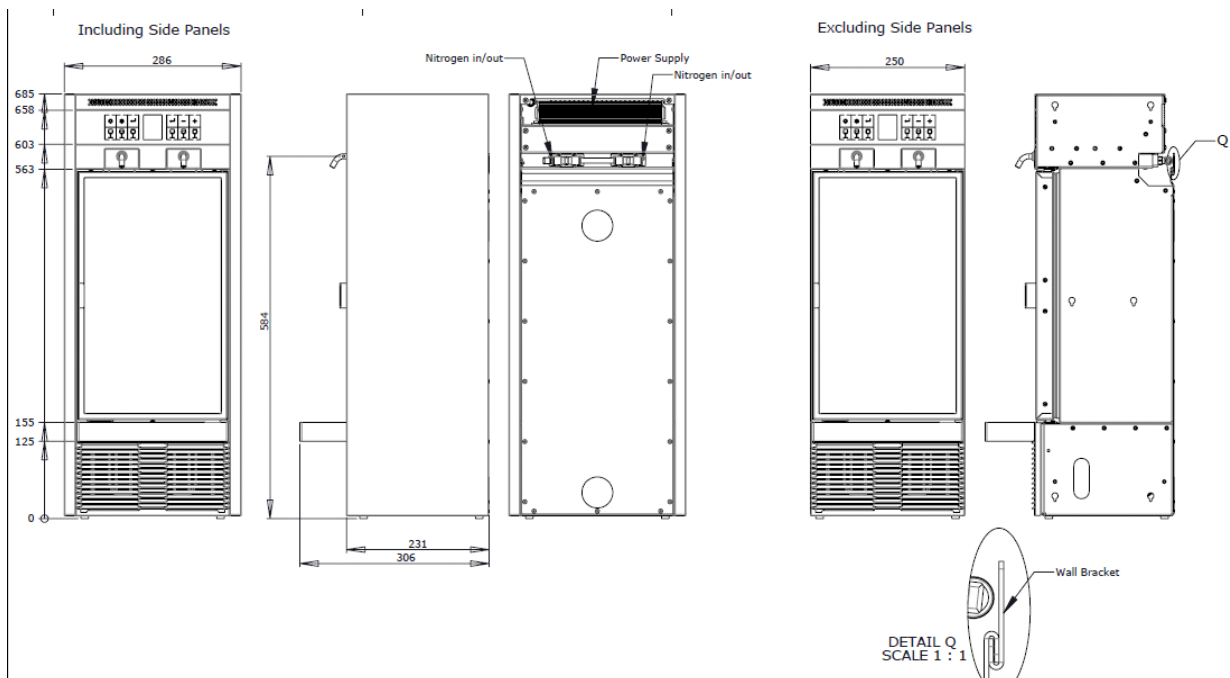


Dimensions and weight

Box: 40x80x35cm

Gross weight (incl box): 26 kgs

Nett weight (excl box): 22 kgs

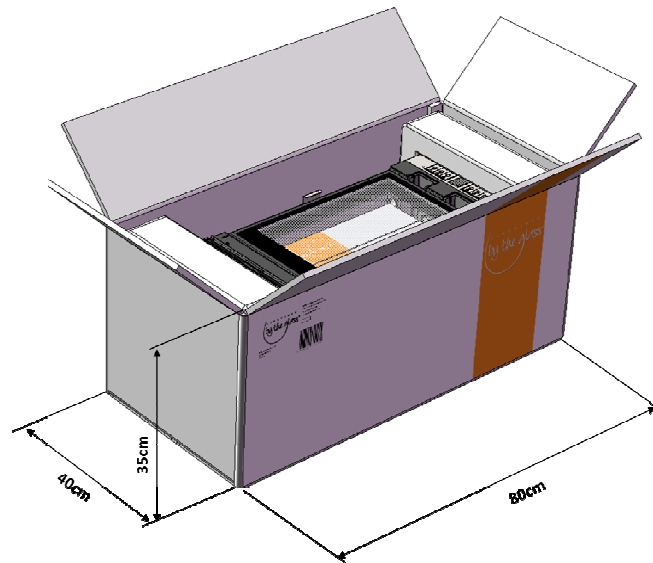

Euro pallet contains 18 boxes

Dimensions pallet: 80x120x223 cm

Weight pallet: 20 kgs

Total weight: 470 kg

