

# WINE MASTER

le temps d'être différent

## DESIGN, SILENCE AND SAVINGS

The WINEPC15 door unit, a practical and aesthetic air conditioning solution for wine cellars, allows you to air condition rooms up to 15 cubic meters in volume.\*

WINE CELLAR AIR CONDITIONER



15 m<sup>3</sup>

Air-conditioning up to 15m<sup>3</sup>



High performance integrated thermostat



Quiet



Respectful of the environment



Ideal climate conditions for the preservation of your wine

# WINE PC15

2 IN 1 PRODUCT

# WINE PC15

## 2 IN 1 PRODUCT

- Door unit delivered along with a full equipment set
- Easy to install and can be adapted to numerous setups
- Discreet and aesthetic with a neutral-colored, homogenous door
- Operates silently through the use of new materials
- An efficient, economical and eco-friendly device

### FULL EQUIPMENT SET

The WINEPC15 door unit is delivered along with its casing, a doorknob and lock set, 7 white plastic covers, and fastening screws.


### EASY TO INSTALL

The door unit is very easy to set up, since all you have to do is inlay the door, embed the air conditioner, and connect it to a plug.

### DISCREET, AESTHETIC AND RELIABLE

The air conditioner is incorporated into the door and is therefore completely invisible from the outside of the cellar. The «door and air conditioner» combination, which is 26 cm wide, allows you to reduce bulk.

### 2 year guarantee

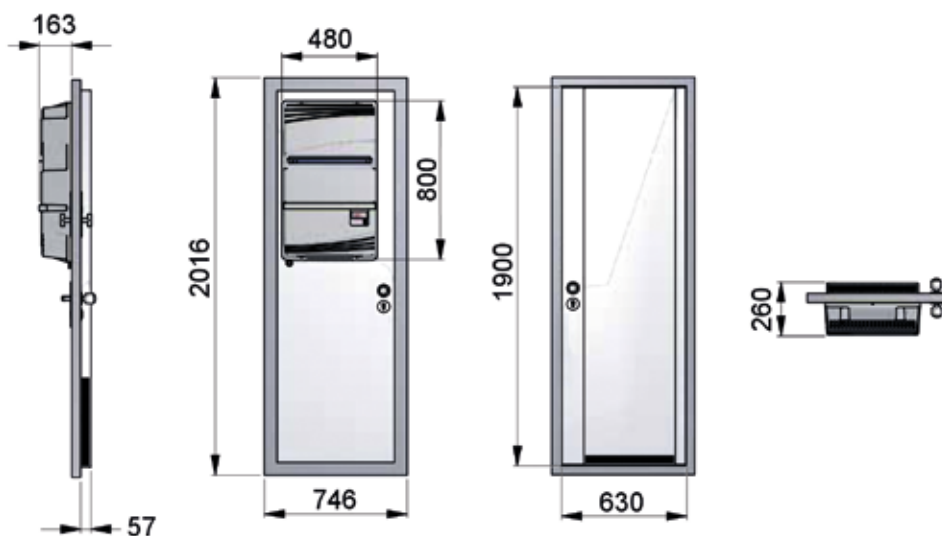

| REFERENCE                                | WINE PC15                 |
|--|---------------------------|
| Electrical supply                        | 230-240 V - 50Hz          |
| Air conditioning capacity*               | Up to 15 m <sup>3</sup> * |
| Overall dimensions                       | W.746 x H.2016 x D.220 mm |
| Electrical power absorbed                | 390 W                     |
| Sound level in the cellar (at 1m and 3m) | 42 dB / 40 dB             |
| Coolant                                  | R404 A ( without CFC )    |
| Cooling capacity                         | 450 W                     |

### CHOICE OF INSULATION\*\*

| Cellar volume (in cubic meters)        | 3  | 6  | 8  | 10 | 12  | 14  | 15  |
|--|----|----|----|----|-----|-----|-----|
| Expanded polystyrene I = 0.044 w / m°C | 40 | 60 | 70 | 90 | 100 | 110 | 110 |
| Extruded polystyrene I = 0.030 w / m°C | 30 | 40 | 50 | 60 | 70  | 70  | 80  |
| Polyurethane foam I = 0.025 w / m°C    | 30 | 40 | 40 | 50 | 60  | 60  | 70  |

\*following the cellar's insulation / \*plan on insulating (wall, ground, ceiling)

**WINEMASTER**  
le temps d'être différent

■ Z.I. VIEUX-THANN - 18 RUE GUY DE PLACE  
BP 60010 - F68801 THANN CEDEX

■ Tél : +33 (0) 389 377 515

■ E-mail : [contactwinemaster.fr](mailto:contactwinemaster.fr)

[www.winemaster.fr](http://www.winemaster.fr)